



Appearance | 外觀


AMTP-LNVA

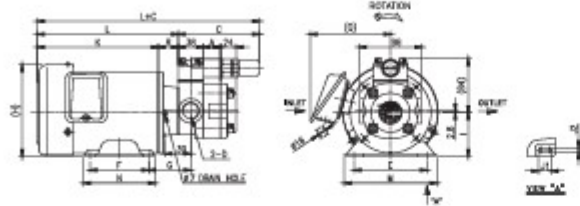

AMTP-LNVB

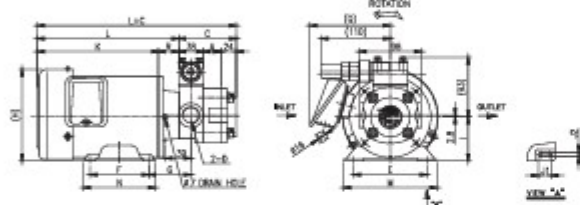

AMTP-LNVT

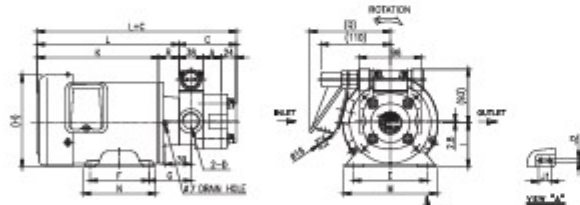

Type		B	C	D (Port Dia)	
				INLET	OUTLET
AMTP-204LN	VA	7	125	PT 1/2"	
	VB	7	69		
	VT	7	69		
AMTP-206LN	VA	10	125	PT 1/2"	
	VB	10	72		
	VT	10	72		
AMTP-208LN	VA	14	125	PT 1/2"	
	VB	14	76		
	VT	14	76		
AMTP-210LN	VA	17	125	PT 3/4"	
	VB	17	79		
	VT	17	79		
AMTP-212LN	VA	20	125	PT 3/4"	
	VB	20	82		
	VT	20	82		
AMTP-216LN	VA	27	125	PT 3/4"	
	VB	27	89		
	VT	27	89		
AMTP-220LN	VA	33	125	PT 3/4"	
	VB	33	95		
	VT	33	95		

Type	E	F	G	H	I	K	L	M	N	Q	R	J1	J2
200W	110	80	67.5	135	64.5	181	212	136	106	122	31	15	7
400W	112	90	65	145	67.5	186	217	143	110	128	31	20	7
700W	125	100	72	170	80.5	226	257	169	124	140	31	30	10

적용 应用	재질 材料
• 사용유체 / 使用介质 : Oils • 동점도 / 粘度 (40°C 기준/为准) : 2 ~ 100 cSt • 사용온도 / 使用温度 - NBR : 80°C 이하 / 以下 - FKM : 180°C 이하 / 以下	• Motor frame : Steel • Pump body : Cast iron • Port housing : Cast iron • Pump cover : Cast iron • Shaft : Steel • Rotor : Powder steel • Oil-seal : NBR - Ø19×Ø35×7t • Relief valve : Cast iron etc.