


250L/LI/LE

Nylon Cable Chain

Inner height (D) 17 mm

Single link construction.
Non-opening version (250L).
Version with opening frames from inner radius (250LI) or from outer radius (250LE).
Vertical separators available.

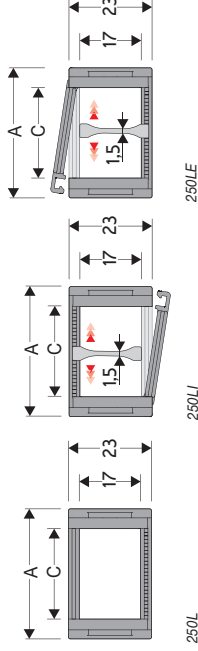

Separator	
- Unassembled	Part.no S250L
- Assembled	Part.no S250LMC

Technical characteristics when self-supported	
Speed	10 m/s
Acceleration	50 m/s ²

For higher requirements please consult our technical dept.

For sliding applications, technical data can slightly change according to frequency, added weight and environment.

SLIDING VERSION
to be ordered with pivoting end brackets set

250L
Non-opening
Sliding



250LI
Frames opening from inner radius
No Sliding





250LE
Frames opening from outer radius
No Sliding



Self-Supporting Capacity Diagram

The maximum length of the self-supporting capacity ($\frac{LS}{2}$) in relationship to the weight of the cables and hoses contained per linear metre.



The red marking in the diagram area considers the difference of weight between various widths of chain.

For applications with $\frac{LS}{2}$ and weights not included in the area of the diagram showing self-supporting capacity, verify the possible use of support rollers (see page 30).

End Brackets

The end brackets set allows the two ends of the chain to be attached to the equipment. End brackets are equipped with tie-wrap clamps.






Fig. A
Chain fixed outside the radius. (Fig A)
See end brackets mounting variations page 31.



How to open the cover.



Chain Type	F1 mm
250L...035...	21
250L...050...	36

Nylon Type Part Numbers	
Chain Type	End Brackets Set
250L	AN250L□□□□*KM□**
Chain Type	End Brackets Set
250L	AN250L□□□□*K□**

* Inner width (C)
** 1=Pos.1; 2=Pos.2; 3=Pos.3
5=Pos.5; 6=Pos.6

For further information please consult Brevetti Stendalto's Technical Office