

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

Item n° :

60212534H

Customer pos. no.:

Model :

JETINOX 132 M IE2

Pump data

Pressure rating : 800 kPa
Min. fluid temperature : 0 °C
Max. fluid temperature : 35 °C
Max. Ambient temperature : 40 °C

Priming capacity :

H m	2	3	4	5	6	7	8	9
Q m³/h	4.68	4.32	4.02	3.66	3.24	2.76	2.28	1.86

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 2.34 kPa

Hydraulic data (duty point)

Flow :
Head :



Materials

Pump body AISI 304 X5 Cr Ni 1810 UNI 6900/71
Disc seal AISI 304 X5 Cr Ni 1810 UNI 6900/71
Impeller Technopolymer A
Mechanical seal Carbon/Ceramic
O-Ring NBR Rubber
Shaft with rotor AISI 416 X12 CrS 13 UNI 6900/71
Nozzle venturi diffuser assembly Technopolymer A

Motor data

Motor brand : DAB
Nominal power P2 : 0.85 kW
Rated speed : 2830 1/min
Rated voltage : 1~ 230 V 50 Hz
Nominal current : 6 A
Degree of protection : IP 44

Curve tolerance according to ISO 9906

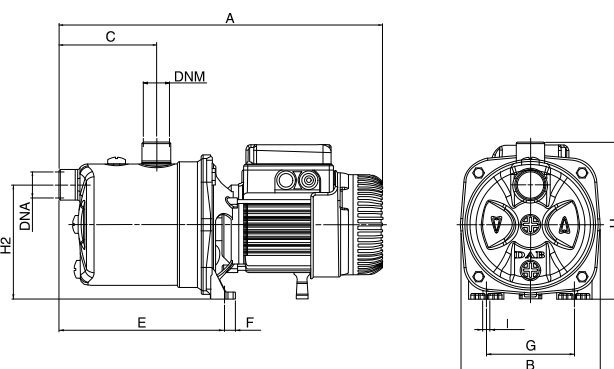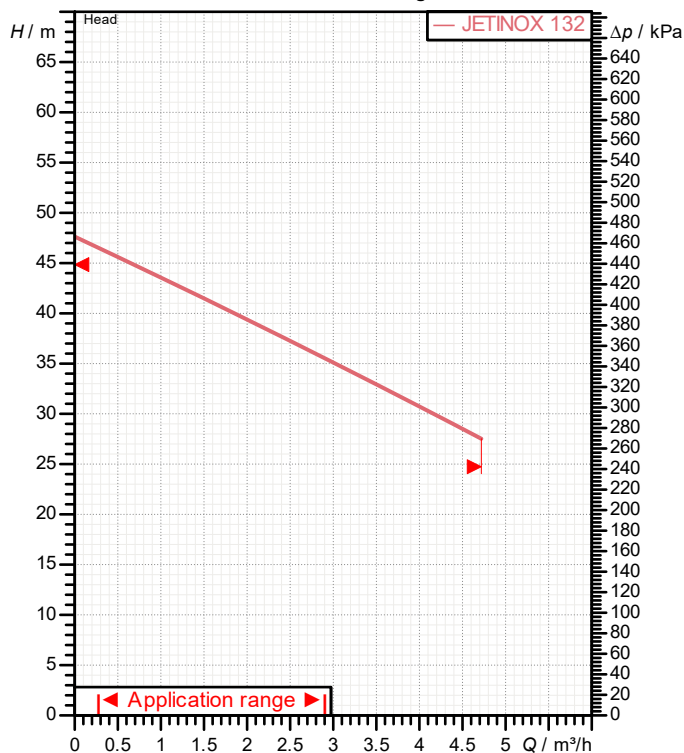

Dimensions in mm

A	424	DNM	1"G	H	197		
B	174	E	207	H2	144		
C	122	F	14	I Ø	9		
DNA	1"G	G	111				

Weight : 11 kg

Pump connection

Suction side : 1" G / 800 kPa
Discharge side : 1" G / 800 kPa


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

JETINOX 132 M IE2

Curve tolerance according to ISO 9906

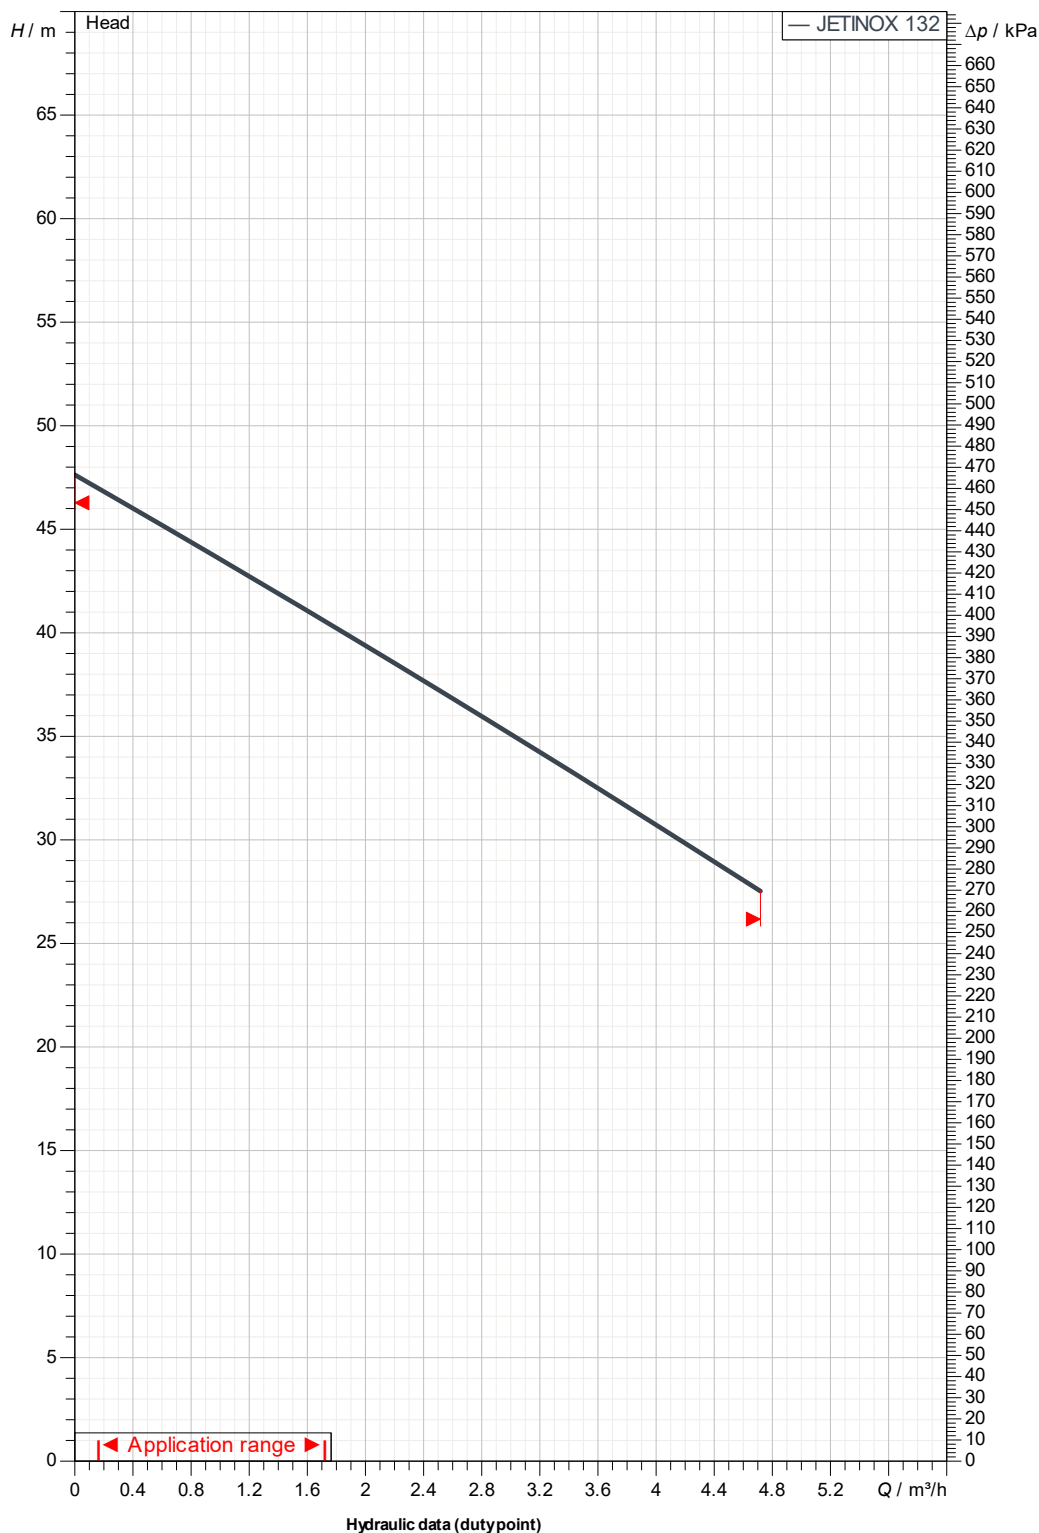

Suction side :
1" G
800 kPa

Discharge side :
1" G
800 kPa

Flow :

Head :

Rated speed :
2830 1/min

Project

Project ID

Created by

Created on

2025-03-26

