

**Product Data Sheet**

**9293510312**

VWC0092JUGBS

3214 J/39NU

**ebm**papst

The engineer's choice



3214 J/39NU

## INDEX

|          |                                    |          |
|----------|------------------------------------|----------|
| <b>1</b> | <b>General .....</b>               | <b>3</b> |
| <b>2</b> | <b>Mechanics .....</b>             | <b>3</b> |
| 2.1      | General.....                       | 3        |
| 2.2      | Connections.....                   | 3        |
| <b>3</b> | <b>Operating Data .....</b>        | <b>4</b> |
| 3.1      | Electrical Operating Data .....    | 4        |
| 3.2      | Electrical Interface - Output..... | 5        |
| 3.3      | Electrical Features .....          | 6        |
| 3.4      | Aerodynamics .....                 | 7        |
| 3.5      | Sound Data.....                    | 8        |
| <b>4</b> | <b>Environment.....</b>            | <b>8</b> |
| 4.1      | General.....                       | 8        |
| 4.2      | Climatic Requirements .....        | 8        |
| <b>5</b> | <b>Safety.....</b>                 | <b>9</b> |
| 5.1      | Electrical Safety .....            | 9        |
| 5.2      | Approval Tests.....                | 9        |
| <b>6</b> | <b>Reliability.....</b>            | <b>9</b> |
| 6.1      | General.....                       | 9        |

## 1 General

|                                     |                        |  |
|-------------------------------------|------------------------|--|
| Fan type                            | Fan                    |  |
| Rotating direction looking at rotor | Clockwise              |  |
| Airflow direction                   | Air outlet over struts |  |
| Bearing system                      | Ball bearing           |  |
| Mounting position - shaft           | Any                    |  |


## 2 Mechanics

### 2.1 General

|                                                       |                                                                         |  |
|-------------------------------------------------------|-------------------------------------------------------------------------|--|
| Width                                                 | 92,0 mm                                                                 |  |
| Height                                                | 92,0 mm                                                                 |  |
| Depth                                                 | 38,0 mm                                                                 |  |
| Mass                                                  | 0,240 kg                                                                |  |
| Housing material                                      | Plastic                                                                 |  |
| Impeller material                                     | Plastic                                                                 |  |
| Max. torque when mounted across both mounting flanges | Wire outlet corner: 30 Ncm<br>Remaining corners: 30 Ncm                 |  |
| Screw size                                            | ISO 4762 - M4 degreased, without an additional brace and without washer |  |

### 2.2 Connections

|                       |             |  |
|-----------------------|-------------|--|
| Electrical connection | Wires       |  |
| Lead wire length      | L = 310 mm  |  |
| Tolerance             | +/- 10,0 mm |  |

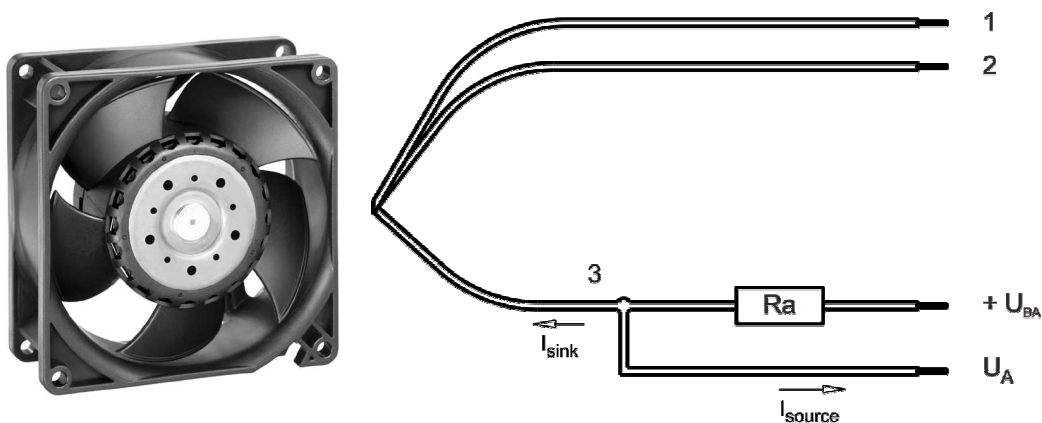

| Wire | Color | Operation | Wire size | Insulation diameter |
|------|-------|-----------|-----------|---------------------|
| 1    | red   | + UB      | AWG 24    | 1,50 mm             |
| 2    | blue  | - GND     | AWG 24    | 1,50 mm             |
| 3    | white | Alarm     | AWG 24    | 1,50 mm             |

The auxiliaries shown on the schematic diagram (which are required for the intended use) are not part of our delivery.

### 3 Operating Data

#### 3.1 Electrical Operating Data


Measurement conditions: Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified). In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$ : corresp. to free air flow (see chapter aerodynamics)  
 I: corresp. to arithm. mean current value

| Features                     | Condition      | Symbol         | Values      |             |             |
|------------------------------|----------------|----------------|-------------|-------------|-------------|
| Voltage range                |                | U              | 11 V        |             | 28 V        |
| Nominal voltage              |                | U <sub>N</sub> |             | 24 V        |             |
| Power consumption            | $\Delta p = 0$ | P              | 1,3 W       | 6,5 W       | 9,5 W       |
| Tolerance                    | 0010           |                | +/- 17,5 %  | +/- 12,5 %  | +/- 15 %    |
| Current consumption          | $\Delta p = 0$ | I              | 115 mA      | 270 mA      | 340 mA      |
| Tolerance                    | 0010           |                | +/- 17,5 %  | +/- 12,5 %  | +/- 15 %    |
| Speed                        | $\Delta p = 0$ | n              | 2.780 1/min | 6.000 1/min | 6.650 1/min |
| Tolerance                    | 0010           |                | +/- 12,5 %  | +/- 7,5 %   | +/- 10 %    |
| Starting current consumption |                |                |             | < 2.250 mA  |             |


## 3.2 Electrical Interface - Output

|            |                                |
|------------|--------------------------------|
| Alarm type | /39 (low = ok, open collector) |
|------------|--------------------------------|

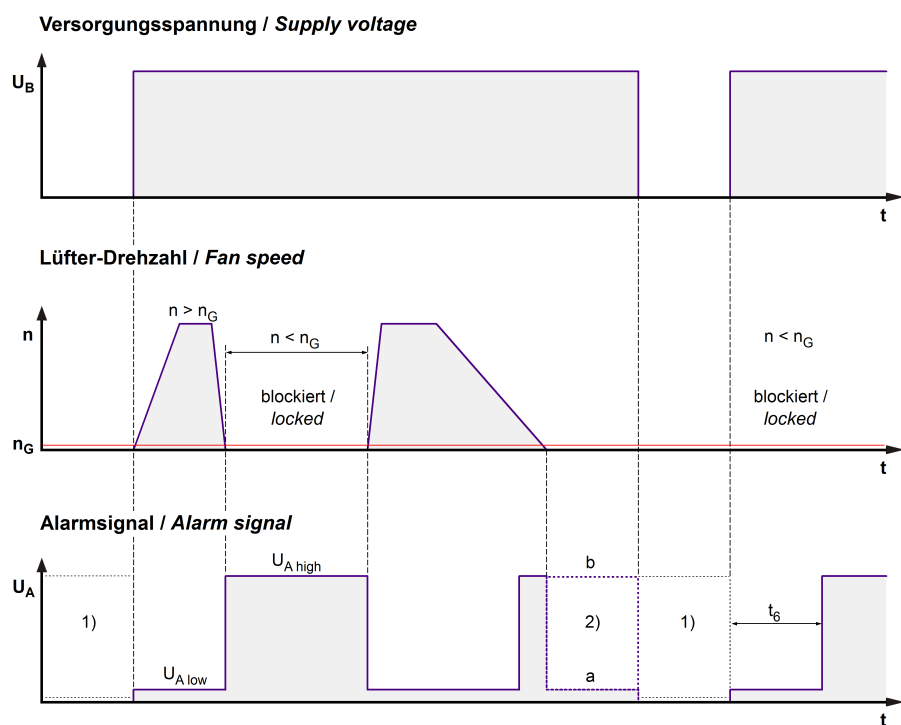

$$R_a = \frac{U_{BA} - U_{A \text{ low}}}{I_{\text{sink}}}$$

**Lüfter / Fan**      **Kunde / Customer**




1) Wenn der Lüfter abgeschaltet ist, hängt der Zustand des Ausgangssignals  $U_A$  von der Kundenapplikation ab.  
When the fan is powered off, the output signal  $U_A$  depends on the customer's application.

2) Für den gültigen Zustand (a oder b) siehe Alarmunterdrückung in der Tabelle.  
For the valid condition (a or b) see alarm suppression in the table.

| Features                  | Note                                                                                  | Values                                                  |
|---------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------|
| Alarm operating voltage   | $U_{BA}$                                                                              | $\leq 30,0 \text{ V}$                                   |
| Alarm signal Low          | $U_{A \text{ low}}$                                                                   | $I_{\text{sink}}: 2 \text{ mA}$<br>$\leq 0,4 \text{ V}$ |
| Alarm signal High         | $U_{A \text{ high}}$                                                                  | $I_{\text{source}}:$<br>$30,0 \text{ V}$                |
| Leakage current           |                                                                                       | $15 \text{ uA}$                                         |
| External resistor         | External resistor $R_a$ from $U_{BA}$ to $U_A$ required. All voltage measured to GND. |                                                         |
| Alarm trip speed limit    | $n_G$                                                                                 | $0 \text{ 1/min}$                                       |
| Alarm at sense failure    | No                                                                                    |                                                         |
| Alarm latch               | No                                                                                    |                                                         |
| Alarm isolated from motor | No                                                                                    |                                                         |

### 3.3 Electrical Features

|                                |                                     |  |
|--------------------------------|-------------------------------------|--|
| Electronic function            | None                                |  |
| Reversed polarity protection   | Rectifying diode                    |  |
| Max. residual current at $U_N$ | $I_F \leq 10 \text{ mA}$            |  |
| Locked rotor protection        | Auto restart                        |  |
| Locked rotor current at $U_N$  | $I_{\text{block}}$ approx. 2.250 mA |  |
| Clock signal at locked rotor   | $t_3 / t_4$ typical: 0,1 s / 8,2 s  |  |

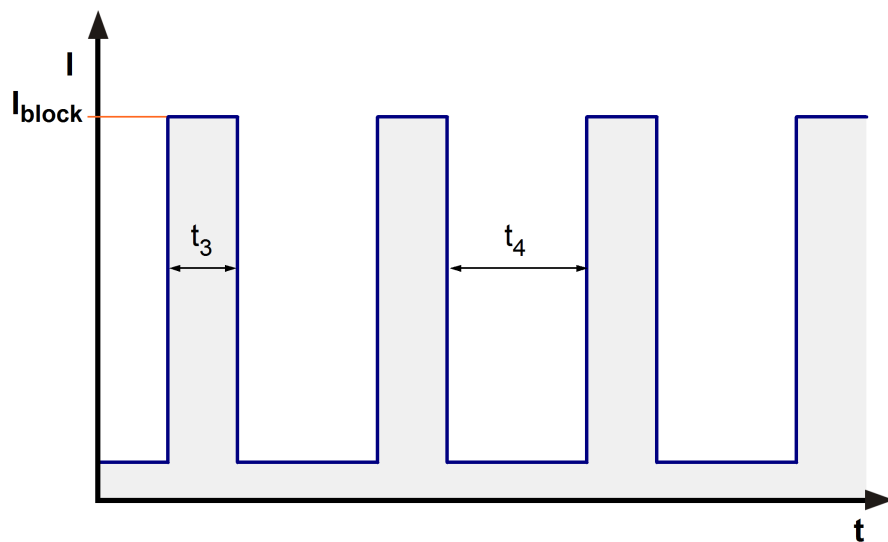


### 3.4 Aerodynamics

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.  
 Normal air density = 1,2 kg/m<sup>3</sup>; Temperature 23°C +/- 3°C;  
 In the intake and outlet area should not be any solid obstruction within 0,5 m. Motor shaft horizontal.  
 The information is only valid under the specified test conditions and may be changed by the installation conditions. If there are deviations from the standard test conditions, the characteristic values must be checked under the installed conditions.

a.) Operation condition:

6.000 1/min at free air flow

|                                                                 |                         |  |
|-----------------------------------------------------------------|-------------------------|--|
| Max. free-air flow ( $\Delta p = 0 / \dot{V} = \text{max.}$ )   | 130,0 m <sup>3</sup> /h |  |
| Max. static pressure ( $\Delta p = \text{max.} / \dot{V} = 0$ ) | 205 Pa                  |  |

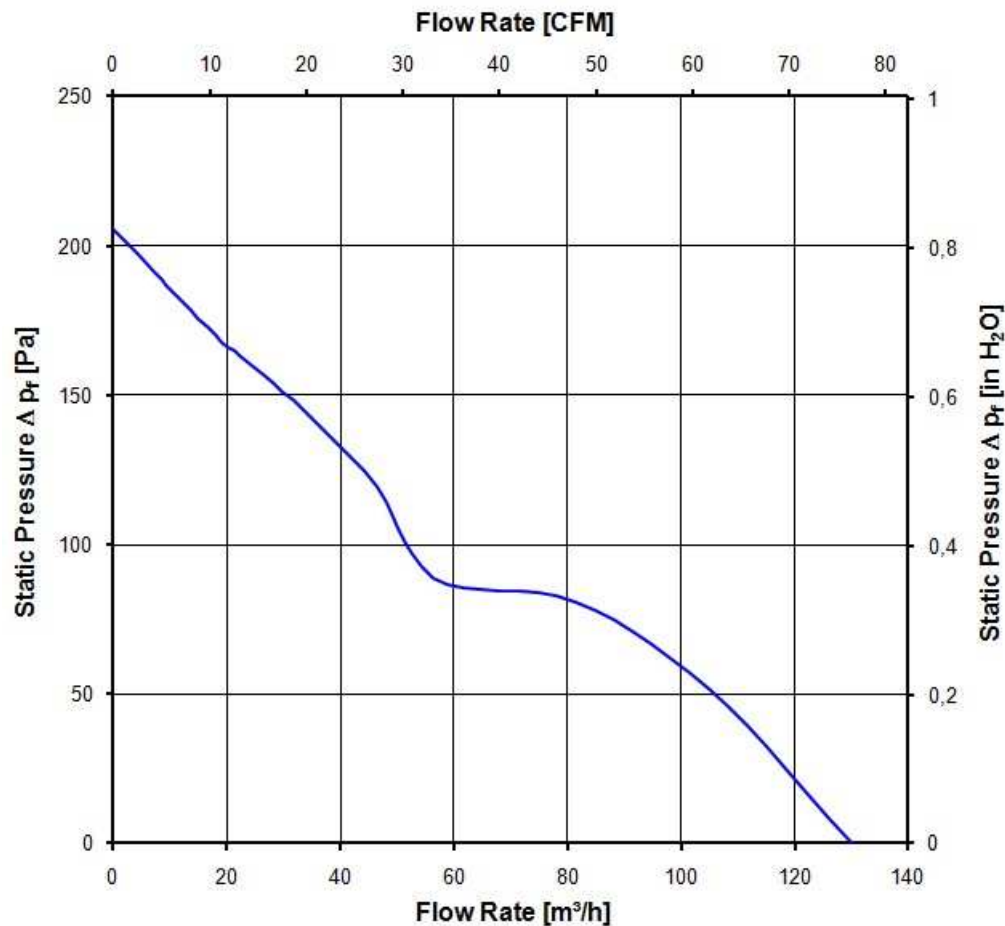

### 3.5 Sound Data

Measurement conditions: Sound pressure level: 1 meter distance between microphone and the air intake.  
Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)  
Measured in a semianchoic chamber with a background noise level of  $L_p(A) < 5 \text{ dB(A)}$   
For further measurement conditions see chapter aerodynamics.

a.) Operation condition:

|                                                                 |                   |  |
|-----------------------------------------------------------------|-------------------|--|
| 6.000 1/min at free air flow                                    |                   |  |
| Optimal operating point                                         | 88,0 m3/h @ 65 Pa |  |
| Sound power level at the optimal operating point                | 6,1 bel(A)        |  |
| Sound pressure level at free air flow, measured in rubber bands | 51,0 dB(A)        |  |

## 4 Environment

### 4.1 General

|                                            |        |  |
|--------------------------------------------|--------|--|
| Min. permitted ambient temperature TU min. | -20 °C |  |
| Max. permitted ambient temperature TU max. | 60 °C  |  |
| Min. permitted storage temperature TL min. | -40 °C |  |
| Max. permitted storage temperature TL max. | 80 °C  |  |

### 4.2 Climatic Requirements

|                       |                                                                                                                                           |  |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--|
| Humidity requirements | humid temperature, cyclic; according to DIN EN 60068-2-38, 10 cycle and condensation water check; according to DIN EN ISO 6270-2, 14 days |  |
| Water exposure        | Splash water check IPX4; according to DIN EN 60529 VDE 0470, not certified                                                                |  |
| Dust requirements     | Dust check IP5X; according to DIN EN 60529 VDE 0470, not certified                                                                        |  |
| Salt fog requirements | None                                                                                                                                      |  |

Permitted application area:

The product is for the use in partial sheltered rooms or open, roofed areas. Direct exposure to water is allowed provided that this does not prevent the normal operation. Saline ambient conditions must be avoided.

Pollution degree 3 (according DIN EN 60664-1)

It occurs conductive pollution or dry non-conductive pollution which becomes conductive due to condensation.

Please require severity levels and specification parameters from the responsible development departments.

## 5 Safety

### 5.1 Electrical Safety

|                                                                                                                                                                                                                                                                                                                                                                                           |                                          |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|--|
| Dielectric strength<br>DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700)<br>A.) Type test<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C.<br>No arcing or breakdown is allowed!<br>All connections together to ground.<br>B.) Routine test<br>Measuring conditions: At indoor climate.<br>No arcing or breakdown is allowed!<br>All connections together to ground. | 500 VAC / 1 Min.<br><br>850 VDC / 1 Sec. |  |
| Isolation resistance<br>Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.                                                                                                                                                                                                                                                                | RI > 10 MOhm                             |  |
| Clearance / creepage distance                                                                                                                                                                                                                                                                                                                                                             | 1,0 mm / 1,2 mm                          |  |
| Protection class                                                                                                                                                                                                                                                                                                                                                                          | III                                      |  |

### 5.2 Approval Tests

|     |                                                                     |                                                                               |
|-----|---------------------------------------------------------------------|-------------------------------------------------------------------------------|
| CE  | EC Declaration of Conformity                                        | Yes                                                                           |
| EAC | Eurasian Conformity                                                 | Yes                                                                           |
| UL  | Underwriters Laboratories                                           | Yes / UL507, Electric Fans E38324                                             |
| VDE | Association for Electrical, Electronic and Information Technologies | Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment |
| CSA | Canadian Standards Association                                      | Yes / C22.2 No. 113 Fans and Ventilators                                      |
| CCC | China Compulsory Certification                                      | Not applicable                                                                |


## 6 Reliability

### 6.1 General

|                                                    |           |  |
|----------------------------------------------------|-----------|--|
| Life expectancy L10 at TU = 40 °C                  | 70.000 h  |  |
| Life expectancy L10 at TU max.                     | 45.000 h  |  |
| Life expectancy L10 acc. to IPC 9591 at TU = 40 °C | 117.500 h |  |

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.


Schutzvermerk nach DIN ISO 16016 beachten

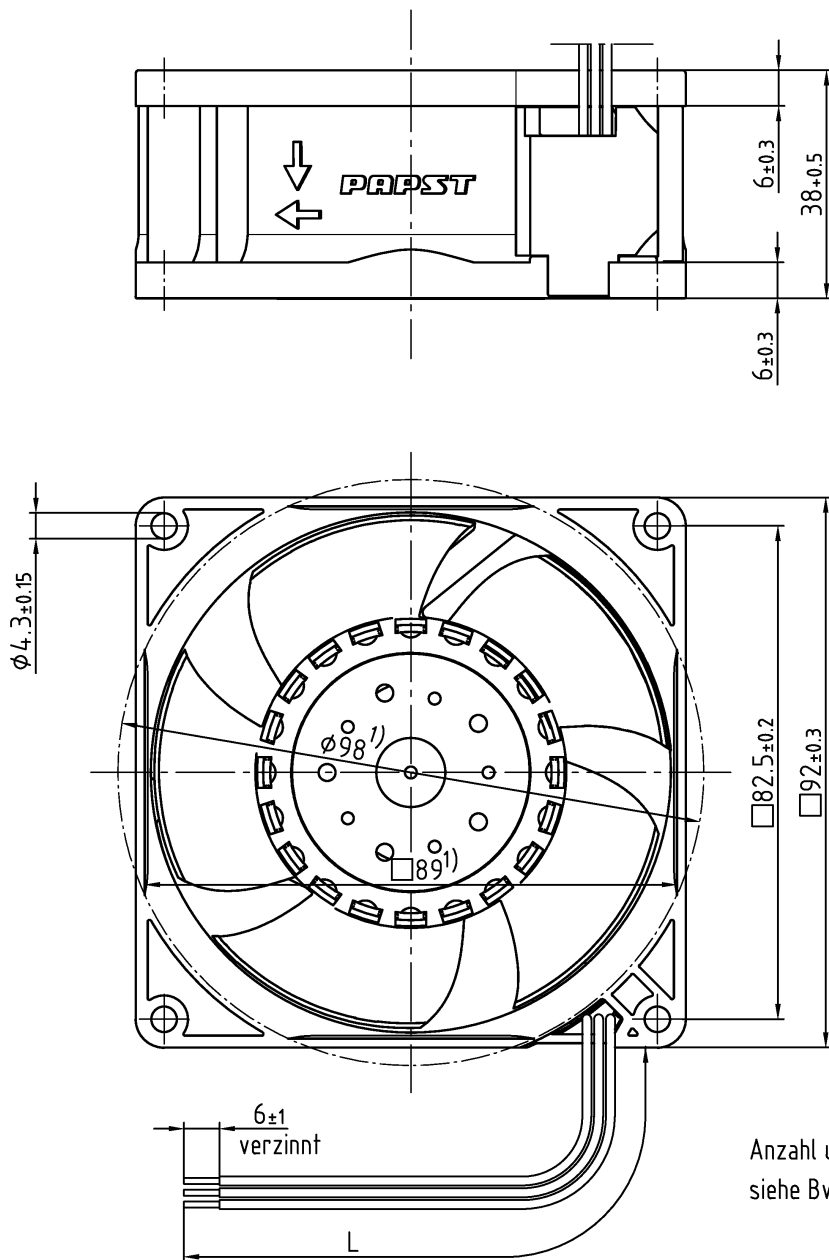

Anzahl und Länge der Litzen  
siehe Bv - Bl.1

Axialspiel bei  
- Kugellagerung (K): 0 (mit Federausgleich)  
- Gleitlagerung (G): 0.1 - 1.6

1) Maße für Montagewand

|                                                 |       |           |                                                                                     |           |         |
|-------------------------------------------------|-------|-----------|-------------------------------------------------------------------------------------|-----------|---------|
| Tolerierung: DIN 7167<br>Allgemeintoleranzen:   |       |           | DIN ISO 2768-mK-E                                                                   |           |         |
|                                                 |       |           |  | Artikel   | Maßstab |
|                                                 | Datum | Name      |                                                                                     |           |         |
| Bearbeitet                                      |       |           | <b>PAPST</b><br>PAPST-MOTOREN GmbH & Co KG<br>D-78112 St.Georgen<br>Germany         | Zchg.-Nr. | Blatt   |
|                                                 | Index | Aend.-Nr. |                                                                                     |           |         |
| Geprüft u. zur Verwendung freigegeben<br>von am |       |           | Ers.f.Zchg:                                                                         | A4        |         |