

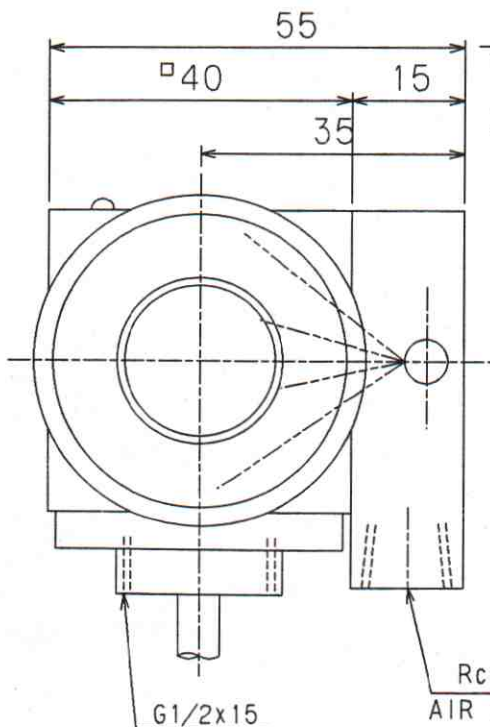
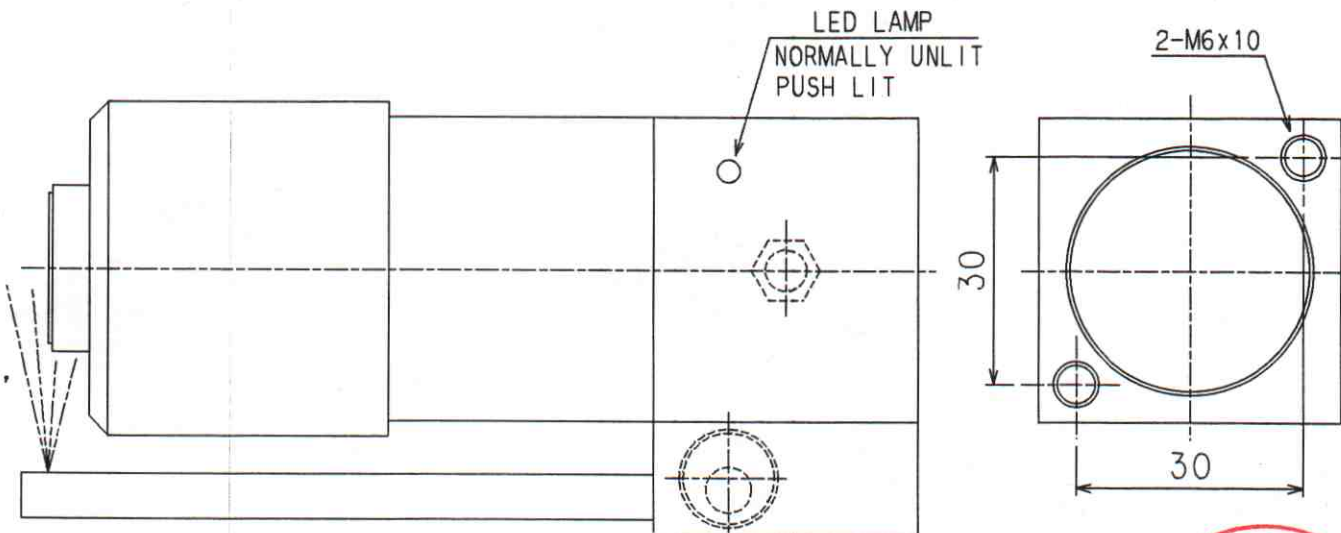


- ① SKIP SIGNAL
REPEATABILITY OF SKIP SIGNAL : 0.001mm
NORMALLY CLOSED
CONTACT RATING : DC24V 10mA
- ② OVER TRAVEL SIGNAL
MICRO SWITCH
NORMALLY CLOSED
CONTACT RATING AC125V 0.3A OR DC30V 0.2A
DEGREES OF PROTECTION : IEC IP67

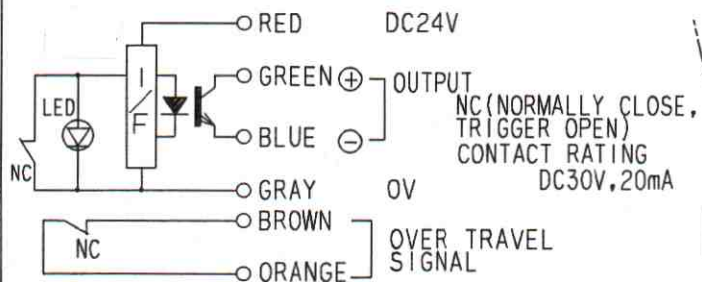

CONTACT
TUNGSTEN
CARBIDE
ACTIVATING
FORCE: 3.5N

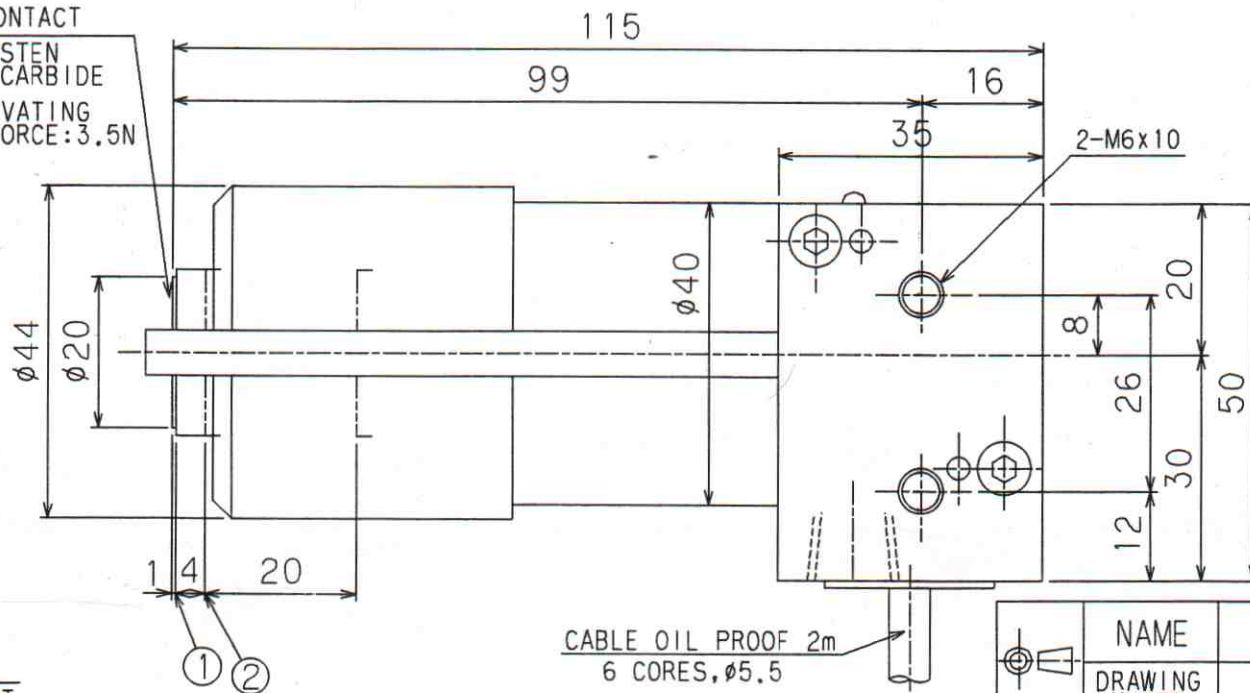

CABLE OIL PROOF 2m
6 CORES, Ø5.5

APR	CHK	DRA
2m	K. EBINA	01.11.13
		HIJIKATA

NAME	TOOL SENSOR
DRAWING NUMBER	T24D-01
METROL LTD.	METROL