

Centering Ring - Aluminum, Stainless Steel

INFICON ISO-K quality fittings are manufactured according to ISO 1609, DIN 28404 and Pneurop 6606. Our quality large diameter fittings are the standard vacuum components for all vacuum and high vacuum lines. The high quality INFICON fittings are designed and tested for leak rates less than 1×10^{-9} mbar l/s.



BENEFITS

- Competitively priced
- World wide logistics
- Design and measures follow strictly international respected standards
- Surface finish, welds, material specifications and cleanliness meet or exceed high vacuum specifications
- 2011/65/EU RoHS compliant


ORDER INFORMATION

Type	DN 63 ISO-K	DN 80 ISO-K	DN 100 ISO-K	DN 160 ISO-K	DN 200 ISO-K	DN 250 ISO-K
Centering ring DN 100 ISO-K, Inox / FPM			212-282			
Centering ring DN 160 ISO, Inox / FPM				212-283		
Centering ring DN 200 ISO-K, Inox / FPM					212-284	
Centering ring DN 250 ISO-K, Inox / FPM						212-285
Centering ring DN 63 ISO-K, INOX/FPM	212-281					
Centering ring DN 80 ISO-K, Inox / FPM		212-093				

SPECIFICATIONS

Type	DN 63 ISO-K	DN 80 ISO-K	DN 100 ISO-K	DN 160 ISO-K	DN 200 ISO-K	DN 250 ISO-K
Dimension A	96	109	128	179	239	287
Dimension B	70	83	102	153	213	261
Dimension C	3.9	3.9	3.9	3.9	3.9	3.9
Dimension D	8	8	8	8	8	8
Inner ring:	Stainless Steel 304					
Outer ring:	Aluminum 6082					
Seal:	FPM	FPM	FPM	FPM	FPM	FPM

DIMENSIONS

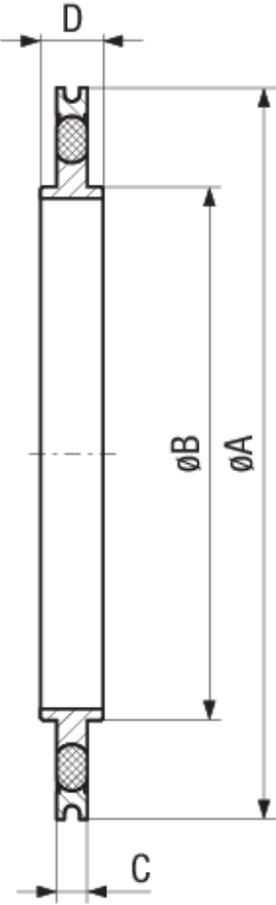

www.inficon.com reachus@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice.
RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2018-08) © 2018 INFICON