

Reducing Cross - Stainless Steel

INFICON ISO-K quality fittings are manufactured according to ISO 1609, DIN 28404 and Pneurop 6606. Our quality large diameter fittings are the standard vacuum components for all vacuum and high vacuum lines. The high quality INFICON fittings are designed and tested for leak rates less than 1×10^{-9} mbar l/s.



BENEFITS

- Competitively priced
- World wide logistics
- Design and measures follow strictly international respected standards
- Surface finish, welds, material specifications and cleanliness meet or exceed high vacuum specifications
- 2011/65/EU RoHS compliant


ORDER INFORMATION

Type	DN 63 ISO-K	DN 100 ISO-K	DN 160 ISO-K
Measurement cross piece, inox, DN 100		212-132	
Measurement cross piece, inox, DN 160			212-133
Measurement cross piece, inox, DN 63	212-131		

SPECIFICATIONS

Type	DN 63 ISO-K	DN 100 ISO-K	DN 160 ISO-K
Dimension A	88	100	100
Dimension B	44	50	50
Dimension C	66	82	107
Dimension D	64	80	107
Dimension E	59	77	105
Material:	Stainless steel 304/-	Stainless steel 304/-	Stainless steel 304/-
Flanges:	1 x DN 16 ISO-KF, 1 x DN 25 ISO-KF, 1 x DN 40 ISO-KF	1 x DN 16 ISO-KF, 1 x DN 25 ISO-KF, 1 x DN 40 ISO-KF	1 x DN 16 ISO-KF, 1 x DN 25 ISO-KF, 1 x DN 40 ISO-KF

DIMENSIONS

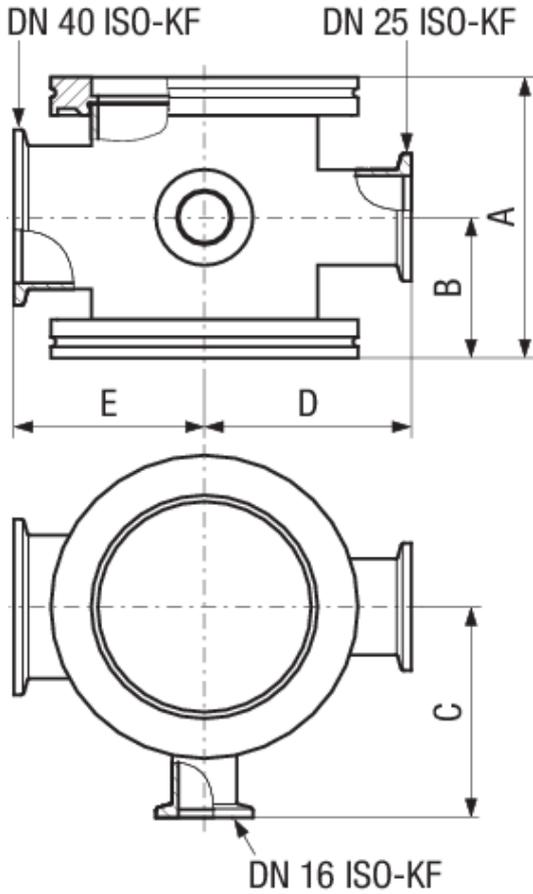

www.inficon.com reachus@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice.
RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2018-08) © 2018 INFICON