

Hexagonal Bolts with Nuts

INFICON CF quality fittings are manufactured according to ISO 3669 and the latest TS/ ISO 3669-2 standard. INFICON Ultra high vacuum fittings are designed for applications down to 1×10^{-12} mbar and bakeout temperatures up to 400°C.

BENEFITS

- World wide logistics
- Design and measures follow strictly international respected standards
- 2011/65/EU RoHS compliant



ORDER INFORMATION

Type	DN 16 CF	DN 40 CF	DN 63 CF	DN 100 CF	DN 160 CF	DN 200-250 CF
Hexagonal screws set with nuts, DN 63 CF			213-403			
Set of hexagonal bolts with nuts, 100 CF				213-404		
Set of hexagonal bolts with nuts, 200 CF						213-406
Set of hexagonal bolts with nuts, 160 CF					213-405	
Set of hexagonal bolts with nuts, 300 CF						
Set of hexagonal bolts with nuts, 350 CF						
Set of hexagonal bolts with, DN 16 CF	213-401					
Set of hexagonal bolts with, DN 40 CF		213-402				

SPECIFICATIONS

Type	DN 16 CF	DN 40 CF	DN 63 CF	DN 100 CF	DN 160 CF	DN 200-250 CF
Dimension A	20	35	45	50	55	60
Dimension B	3.2	5	6.5	6.5	6.5	6.5
Set of:	25 x M4	25 x M6	25 x M8	25 x M8	25 x M8	25 x M8
Tightening torque:	3.5 Nm	10 Nm	20 Nm	20 Nm	20 Nm	20 Nm
Bolt:	Stainless Steel 316 / 1.4401					
Washer:	Stainless Steel 304 / 1.4301					
Nut:	Stainless Steel 316 / 1.4401					


213-408

213-409

SPECIFICATIONS

Type	DN 300 CF	DN 350 CF
Dimension A	70	70
Dimension B	8	8
Set of:	34 x M10	38 x M10
Tightening torque:	30 Nm	30 Nm
Bolt:	Stainless Steel 316 / 1.4401	Stainless Steel 316 / 1.4401
Washer:	Stainless Steel 304 / 1.4301	Stainless Steel 304 / 1.4301
Nut:	Stainless Steel 316 / 1.4401	Stainless Steel 316 / 1.4401

DIMENSIONS

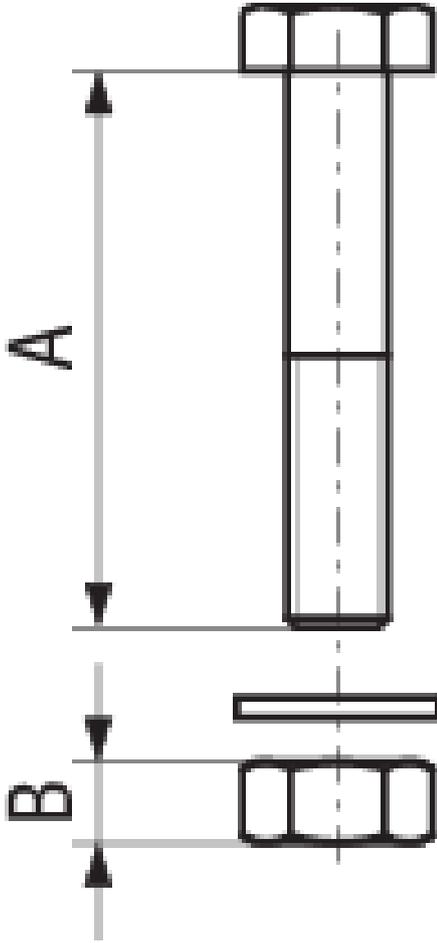

www.inficon.com reachus@inficon.com

Due to our continuing program of product improvements, specifications are subject to change without notice.
RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2018-08) © 2018 INFICON