

# Tee - Stainless Steel 304L

---

INFICON CF quality fittings are manufactured according to ISO 3669 and the latest TS/ ISO 3669-2 standard. INFICON Ultra high vacuum fittings are designed for applications down to  $1 \times 10^{-12}$  mbar and bakeout temperatures up to 400°C.

## BENEFITS

---

- World wide logistics
- Design and measures follow strictly international respected standards
- Surface finish, welds, material specifications and cleanliness meet or exceed high vacuum standards
- 2011/65/EU RoHS compliant



## ORDER INFORMATION


---

Type	DN 16 CF	DN 40 CF	DN 63 CF	DN 100 CF	DN 160 CF
T piece DN 100 CF				213-314	
T-piece DN 16 CF	213-311				
T-piece DN 160 CF					213-315
T-piece DN 40 CF		213-312			
T-piece DN 63 CF			213-313		

## SPECIFICATIONS

Type	DN 16 CF	DN 40 CF	DN 63 CF	DN 100 CF	DN 160 CF
Dimension A	38	63	105	135	167
Dimension B	0.5	0.5	1	1	1.5
Dimension C	0.5	0.5	1	1	1.5
Dimension D	15	38	66	100	150
Material:	Stainless steel 304L / 1.4306				

## DIMENSIONS

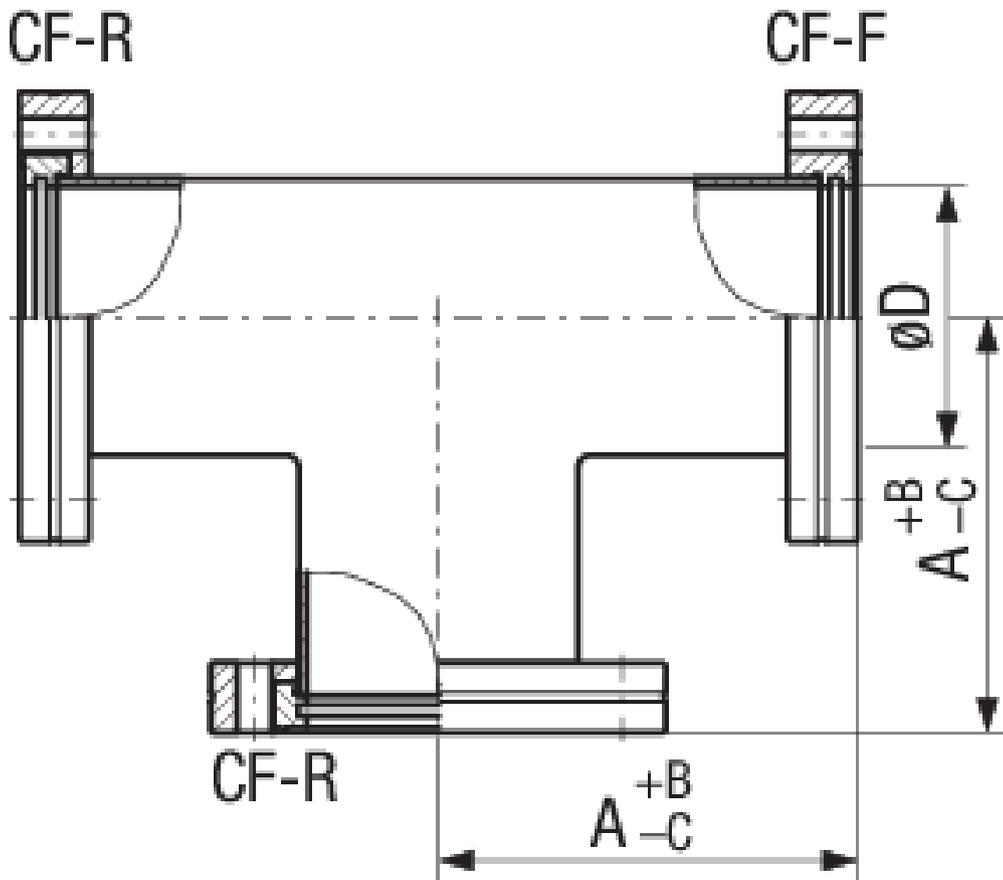

[www.inficon.com](http://www.inficon.com) [reachus@inficon.com](mailto:reachus@inficon.com)

Due to our continuing program of product improvements, specifications are subject to change without notice. RateWatcher is a trademark of INFICON. All other trademarks are the property of their respective owners.

(2018-08) © 2018 INFICON