

variable speed drive, Altivar Machine ATV340, 0.75kW, heavy duty, 400V, 3 phases

ATV340U07N4

Product availability: Non-Stock - Not normally stocked in distribution facility

Main

Range of Product	Altivar Machine ATV340	
Product or Component Type	Variable speed drive	
Product Specific Application	Machine	
Mounting Mode	Cabinet mount	
Variant	Standard version	
Communication Port Protocol	Modbus serial	
Option card	communication module, Profibus DP V1 communication module, PROFINET communication module, DeviceNet communication module, CANopen communication module, EtherCAT	
Phase	3 phase	
Supply frequency	5060 Hz +/- 5 %	
[Us] rated supply voltage	380480 V - 1510 %	
nominal output current	2.2 A	
Motor power kW	1.1 kW normal duty 0.75 kW heavy duty	
Maximum Horse Power Rating	1.5 hp normal duty 1 hp heavy duty	
EMC filter	Class C3 EMC filter integrated	
IP degree of protection	IP20	

Complementary

Discrete input number	5	
Discrete input type	PTI programmable as pulse input 030 kHz, 24 V DC 30 V) DI1DI5 safe torque off, 24 V DC 30 V)3.5 kOhm programmable	
number of preset speeds	16 preset speeds	
Discrete output number	2.0	
Discrete output type	Programmable output DQ1, DQ2 30 V DC 100 mA	
Analogue input number	2	
Analogue input type	Al1 software-configurable current 020 mA 250 Ohm 12 bits Al1 software-configurable temperature probe or water level sensor Al1 software-configurable voltage 010 V DC 31.5 kOhm 12 bits Al2 software-configurable voltage - 1010 V DC 31.5 kOhm 12 bits	
Analogue output number	1	

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Analogue output type	Software-configurable voltage AQ1 010 V DC 470 Ohm 10 bits Software-configurable current AQ1 020 mA 500 Ohm 10 bits	
Relay output number	2	
Output voltage	<= power supply voltage	
Relay output type	Relay outputs R1A Relay outputs R1C 100000 cycles Relay outputs R2A Relay outputs R2C 100000 cycles	
Maximum switching current	Relay output R1C resistive, cos phi = 1 3 A 250 V AC Relay output R1C resistive, cos phi = 1 3 A 30 V DC Relay output R1C inductive, cos phi = 0.4 7 ms 2 A 250 V AC Relay output R1C inductive, cos phi = 0.4 7 ms 2 A 30 V DC Relay output R2C resistive, cos phi = 1 5 A 250 V AC Relay output R2C resistive, cos phi = 1 5 A 30 V DC Relay output R2C inductive, cos phi = 0.4 7 ms 2 A 250 V AC Relay output R2C inductive, cos phi = 0.4 7 ms 2 A 250 V AC Relay output R2C inductive, cos phi = 0.4 7 ms 2 A 30 V DC	
Minimum switching current	Relay output R1B 5 mA 24 V DC Relay output R2C 5 mA 24 V DC	
Physical interface	2-wire RS 485	
Connector Type	1 RJ45	
Method of access	Slave Modbus RTU	
Transmission Rate	4.8 kbit/s 9.6 kbit/s 19.2 kbit/s 38.4 kbit/s	
Transmission frame	RTU	
Number of addresses	1247	
Data format	8 bits, configurable odd, even or no parity	
Type of polarization	No impedance	
4 quadrant operation possible	True	
Asynchronous motor control profile	Constant torque standard Variable torque standard Optimized torque mode	
Synchronous motor control profile	Permanent magnet motor Reluctance motor	
Pollution degree	2 IEC 61800-5-1	
Maximum output frequency	0.599 kHz	
Acceleration and deceleration ramps	S, U or customized Linear adjustable separately from 0.019999 s	
Motor slip compensation	Can be suppressed Not available in permanent magnet motor law Automatic whatever the load Adjustable	
Switching frequency	216 kHz adjustable 1416 kHz with derating factor	
Nominal switching frequency	4 kHz	
Braking to standstill	By DC injection	
Brake chopper integrated	True	
Line current	2.6 A 380 V normal duty) 2.1 A 480 V normal duty) 3.4 A 380 V heavy duty) 2.6 A 480 V heavy duty)	

Line current	2.6 A 480 V without line choke heavy duty) 2.6 A 380 V with external line choke normal duty) 2.1 A 480 V with external line choke normal duty)	
	1.9 A 380 V with external line choke heavy duty) 1.6 A 480 V with external line choke heavy duty) 3.4 A 380 V without line choke heavy duty)	
Maximum Input Current per Phase	3.4 A	
Maximum output voltage	480 V	
Apparent power	2.2 kVA 480 V normal duty) 2.2 kVA 480 V heavy duty)	
Maximum transient current	3.1 A 60 s normal duty) 3.3 A 60 s heavy duty) 3.8 A 2 s normal duty) 4 A 2 s heavy duty)	
Electrical connection	Screw terminal 1.54 mm² line side Screw terminal 46 mm² DC bus Screw terminal 1.54 mm² motor Screw terminal 0.22.5 mm² control	
Prospective line Isc	5 kA	
Base load current at high overload	2.2 A	
Base load current at low overload	2.8 A	
Power dissipation in W	Natural convection 28 W 380 V 4 kHz heavy duty) Forced convection 28 W 380 V 4 kHz heavy duty) Natural convection 33 W 380 V 4 kHz normal duty) Forced convection 33 W 380 V 4 kHz normal duty)	
Electrical connection	Line side screw terminal 1.54 mm² AWG 14AWG 12 DC bus screw terminal 46 mm² AWG 12AWG 10 Motor screw terminal 1.54 mm² AWG 14AWG 12 Control screw terminal 0.22.5 mm² AWG 24AWG 12	
With safety function Safely Limited Speed (SLS)	True	
With safety function Safe brake management (SBC/SBT)	True	
With safety function Safe Operating Stop (SOS)	False	
With safety function Safe Position (SP)	False	
With safety function Safe programmable logic	False	
With safety function Safe Speed Monitor (SSM)	False	
With safety function Safe Stop 1 (SS1)	True	
With sft fct Safe Stop 2 (SS2)	False	
With safety function Safe torque off (STO)	True	
With safety function Safely Limited Position (SLP)	False	
With safety function Safe Direction (SDI)	False	

Protection type	Thermal protection motor		
	Safe torque off motor		
	Motor phase loss motor		
	Thermal protection drive		
	Safe torque off drive		
	Overheating drive		
	Overcurrent drive		
	Output overcurrent between motor phase and earth drive		
	Output overcurrent between motor phases drive		
	Short-circuit between motor phase and earth drive		
	Short-circuit between motor phases drive		
	Motor phase loss drive		
	DC Bus overvoltage drive Line supply overvoltage drive		
			Line supply undervoltage drive
		Input supply loss drive	
	Exceeding limit speed drive		
	Break on the control circuit drive		
Width	3.3 in (85.0 mm)		
Height	10.6 in (270.0 mm)		
Depth	9.2 in (232.5 mm)		
Net Weight	3.7 lb(US) (1.7 kg)		
Continuous output current	2.2 A 4 kHz heavy duty		
•	2.8 A 4 kHz normal duty		

Environment

Operating altitude	<= 9842.52 ft (3000 m) with current derating above 1000m	
Operating position	Vertical +/- 10 degree	
Product Certifications	UL CSA TÜV EAC CTick	
Marking	CE	
Standards	IEC 61800-3 IEC 61800-5-1 IEC 60721-3 IEC 61508 IEC 13849-1 UL 618000-5-1 UL 508C	
Assembly style	With heat sink	
Electromagnetic compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6	
Environmental class (during operation)	Class 3C3 according to IEC 60721-3-3 Class 3S3 according to IEC 60721-3-3	
Maximum acceleration under shock impact (during operation)	70 m/s² at 22 ms	
Maximum acceleration under vibrational stress (during operation)	5 m/s² at 9200 Hz	
Maximum deflection under vibratory load (during operation)	1.5 mm at 29 Hz	
Permitted relative humidity (during operation)	Class 3K5 according to EN 60721-3	
Volume of cooling air	4755.2 Gal/hr(US) (18.0 m3/h)	
type of cooling	Forced convection	
Overvoltage category	Class III	

Regulation loop	Adjustable PID regulator	
Noise level	52.7 dB	
Pollution degree	2	
Ambient air transport temperature	-40158 °F (-4070 °C)	
Ambient air temperature for operation	5122 °F (-1550 °C) without derating vertical position) 122140 °F (5060 °C) with derating factor vertical position)	
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)	
Isolation	Between power and control terminals	

Ordering and shipping details

Category	US1CP4B22182
Discount Schedule	CP4B
GTIN	3606480966873
Returnability	Yes
Country of origin	ID

Packing Units

•	
Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	4.21 in (10.700 cm)
Package 1 Width	13.90 in (35.300 cm)
Package 1 Length	11.34 in (28.800 cm)
Package weight(Lbs)	5.362 lb(US) (2.432 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	14
Package 2 Height	29.53 in (75.000 cm)
Package 2 Width	23.62 in (60.000 cm)
Package 2 Length	31.50 in (80.000 cm)
Package 2 Weight	103.723 lb(US) (47.048 kg)



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	1335
Environmental Disclosure	Product Environmental Profile

Use Better

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	81d6792e-d307-4115-9475-2db3f34c93af
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
Product contributes to saved and avoided emissions	Yes

Use Again


○ Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

ATV340U07N4

Dimensions Drawings

Dimensions


Views: Front - Left - Rear

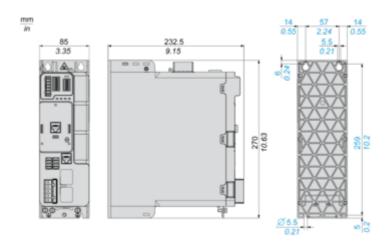


ATV340U07N4

Mounting and Clearance

Clearance

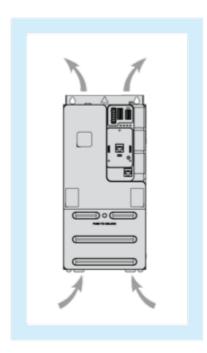


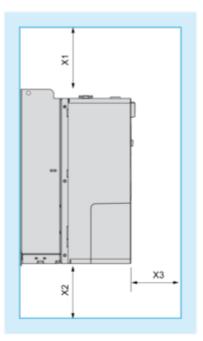

X1	X2	Х3			
mm	in.	mm	in.	mm	in.
≥ 100	≥ 3.94	≥ 100	≥ 3.94	≥ 60	≥ 2.36


Mounting Types

Mounting Type A: Side by Side IP20



Possible, at ambient temperature ≤ 50 °C (122 °F)

Mounting Type B: Individual IP20

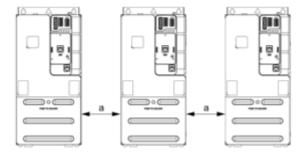


 $a \ge 50$ mm (1.97 in.) from 50...60°C, no restriction below 50°C

Connections and Schema


Connections and Schema

Three-phase Power Supply - Diagram With Line Contactor

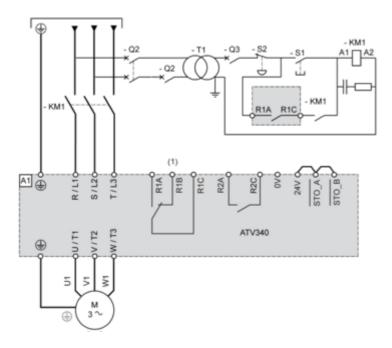

- (1) : Use relay output R1 set to operating state Fault to switch Off the product once an error is detected. NOTE :
- Press S1 until the initialization of the drive is finished.
- An external 24V power supply can be connected so that the control part of the drive is always power supplied.

Three-phase Power Supply - Diagram With Downstream Contactor

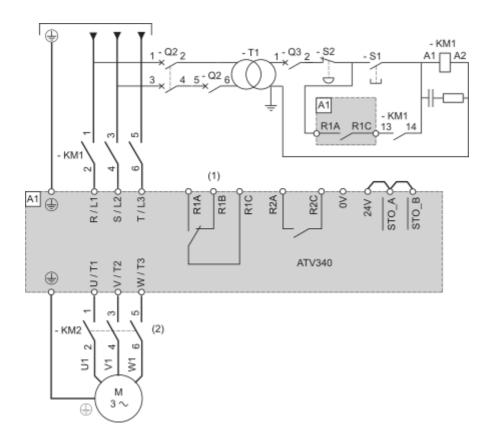


ATV340U07N4

- (1): Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.
- (2): Command of KM2 can be done by using the [Output contactor cmd] OCC function. For more information, refer to the programming manual.


NOTE:

- Close upstream contactor, then press S1 after the initialization of the drive is finished.
- An external 24V power supply can be connected so that the control part of the drive is always power supplied.

Sensor Connection

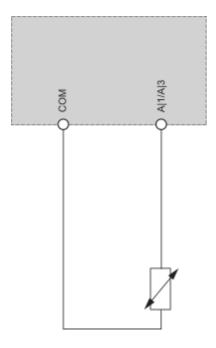

Control Block Wiring Diagram

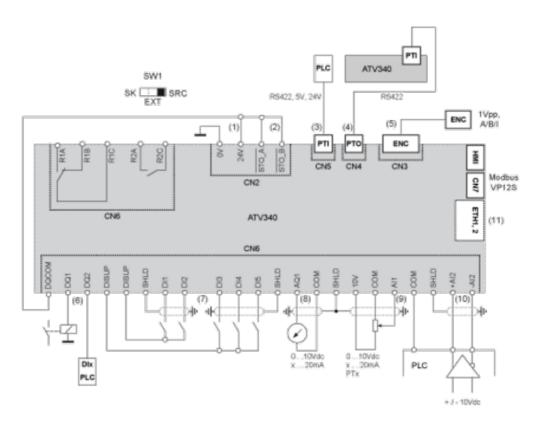


- (1): 24V In, Out, maximum supply current 200 mA is provided,
- (2): STO Safe Torque Off, see ATV340 Embedded safety function manual NVE64143
- (3): PTI Pulse Train In, from external source (eg.PLC) Pulse Direction or A-B signals can be connected
- (4) : PTO Pulse Train Out, can be used to connect to a 2nd ATV340 PTI
- (5): To connect a motor position feedback encoder
- (6) : Digital output, e.g. to connect a contactor, also usable as DI
- (7) : Digital inputs
- (8) : Analog output, e.g. to connect a meter
- (9): Analog input, e.g. from potentiometer
- (10) : Differential analog input, e.g. as speed reference from external PLC differential, +/– 10 $\rm V$
- (11): 2 advanced Ethernet ports ETH1, ETH2 (ATV340*****E) or 2 Sercos III ports S3P1, S3P2 (ATV340*****S)

Digital Inputs Wiring


Digital Inputs: Internal Supply

Using DISUP Signal




In SRC position DISUP outputs 24 V. In SK position DISUP is connected to 0 V.

Digital Inputs: External Supply Positive Logic, Source, European Style




Negative Logic, Sink, Asian Style



Digital Inputs: Internal supply Negative Logic, Sink, Asian Style

ATV340U07N4




ATV340U07N4

Digital Outputs Wiring


Digital Outputs: Internal Supply

Positive Logic, Source, European Style, DQCOM to +24V



(1) Relay or valve


Negative Logic, Sink, Asian Style, DQCOM to 0V



(1) Relay or valve

Digital Outputs: External Supply


Positive Logic, Source, European Style, DQCOM to +24V



(1) Relay or valve

Negative Logic, Sink, Asian Style, DQCOM to 0V

ATV340U07N4



(1) Relay or valve

ATV340U07N4

Technical Illustration

Dimensions

